

**CERTIFICATE OF QUALITY AND MATERIAL TESTING**

INSPECTION CERTIFICATE N. **AC/ 4364** DATE : **05/12/18**  
according to EN 10234.3.1

FIRM :  
ORDER : **PO5378** ORDER CONFIRMATION : **206807**

HEAT	N. of PCS	MATERIAL DESCRIPTION	MATERIAL GRADE
<b>63352</b>	<b>2</b>	<b>FORGED ROUND PEELED BARS Ø17"</b>  Lbs 10454,329 x 13,03478 feet Lbs 11422,159 x 14,31759 feet	<b>316/316L</b> <b>UNS S31600 /S31603</b> <b>SS1 Rev.5.4</b> <b>ASTM A276-17</b> <b>ASTM A479-18</b> <b>ASTM A484-18</b> <b>ASME Code Sec.II Part. A SA479-17</b> <b>AMS 5653H</b> <b>AMS QQS 783D Cond.A</b> <b>AMS 5648M</b> <b>AMS S-7720 316</b> <b>NACE MR 0103-2015</b> <b>NACE MR 0175/ISO 15156-2015</b>

H.T. CONDITION: Solution annealed 1050°C (8h) + water quenched

**HEAT ANALYSIS**

C	Mn	Si	P	S	Cr	Ni	Mo	Cu	Sn (ppm)
0,014	1,77	0,44	0,029	0,0214	16,66	10,84	2,20	0,433	79
Ca	Al	V	Ti	W	Ta	As (ppm)	Co	Nb	Pb (ppm)
0,0042	0,009	0,057	0,003	0,050	0,0018	51	0,117	0,042	<20
B	N	Zr	Sb	Fe	PRE	Ferrite (%) ASTM E562	Grain size ASTM E112		
0,0003	0,067						5		

**TEST RESULTS ON ACTUAL BAR PROLONGATION**

Temp. [°C]	Direction	Rp0.2 [KSI]	Rm [KSI]	A [%]	Z [%]	KV (10 X 10 mm) [J]	Hardness
RT	L	42	78	59,2	80,1		HBw 162 HRc <22

Steelmaking process E.A.F. + A.O.D. refining  
No welding performed on material  
Material free from Mercury contamination  
Material inspected with a gamma spectrometer and with no radioactive contamination beyond the limits provided for by the EU-Radiation Protection 122- part 1, when relevant  
Mechanical tests performed according to ASTM A370-17a (Ø12,5mm-50mm length) + ASTM E10-17 + ASTM E18-18a  
Corrosion test according to ASTM A262 P1E satisfactory performed  
Chemical analysis and mechanical properties according to ASTM A182-18a-ASME SA182-17 (F316-F316L) - ASTM A193-17 - ASME SA193-17 (Grade B8M Class 1)  
Country of melt and country of manufacture: Italy  
Italfond is in compliance with DFARS regulation 252 225-7017  
Forging ratio 3,1:1  
PMI performed

SURVEYORS	CUSTOMER INSPECTION	ITALFOND S.p.A. Quality Assurance
		 <b>GARANZIA QUALITÀ</b>

CA48603 V3

ANS

**CERTIFICATE OF QUALITY AND MATERIAL TESTING**  
**MICROGRAPHIC EXAMINATION**

INSPECTION CERTIFICATE N. **ME/ 4364** DATE : **05/12/18**  
 according to EN 10204.3.1

FIRM :  
 ORDER : **PO5378** ORDER CONFIRMATION: **206807**

HEAT	N. of PCS	MATERIAL DESCRIPTION	MATERIAL GRADE
63352	2	FORGED ROUND PEELED BARS Ø17"  lbs 10454,329 x 13,03478 feet lbs 11422,159 x 14,31759 feet	316/316L UNS S31600 /S31603 SS1 Rev.5.4 ASTM A276-17 ASTM A479-18 ASTM A484-18 ASME Code Sec.II Part. A SA479-17 AMS 5653H AMS QQS 763D Cond.A AMS 5648M AMS S-7720 316 NACE MR 0103-2015 NACE MR 0175/ISO 15156-2015

H.T. CONDITION : Solution annealed 1050°C (8h) + water quenched

**MICROGRAPHIC EXAMINATION - MID RADIUS**

Magnification: 100 x  
 Etching: electrolytic, Oxalic Acid 3v 20s according to ASTM E407



RESULT: Omogeneous structure free from detrimental phases and precipitates

SURVEYORS	CUSTOMER INSPECTION	ITALFOND S.p.A. Quality Assurance
		 <b>ITALFOND</b> GARANZIA QUALITÀ

CQAS 603 2/2

**CERTIFICATE OF QUALITY AND MATERIAL TESTING**  
**MACROGRAPHIC EXAMINATION**

INSPECTION CERTIFICATE N. **ME2/ 4364** DATE : **05/12/18**  
 according to EN 10204.3.1


FIRM :  
 ORDER : **P05378** ORDER CONFIRMATION: **206807**

HEAT	N. of PCS	MATERIAL DESCRIPTION	MATERIAL GRADE
63352	2	FORGED ROUND PEELED BARS Ø17"  Lbs 10454,329 x 13,03478 feet Lbs 11422,159 x 14,31759 feet	316/316L UNS S31600 /S31603 SS1 Rev.5.4 ASTM A276-17 ASTM A479-18 ASTM A484-18 ASME Code Sec.II Part. A SA479-17 AMS 5653H AMS QQS 763D Cond.A AMS 5648M AMS S-7720 316 NACE MR 0103-2015 NACE MR 0175/ISO 15156-2015

H.T. CONDITION : Solution annealed 1050°C (8h) + water quenched

**MACROGRAPHIC EXAMINATION**

Etching: Aquaregia

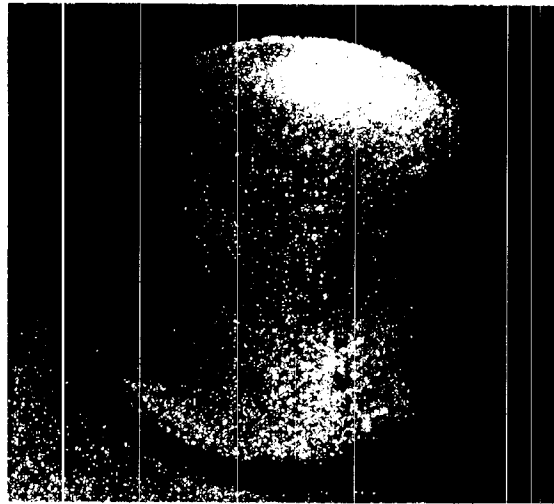

SURVEYORS	CUSTOMER INSPECTION	ITALFOND S.p.A. Quality Assurance
		 <b>CARANZIA QUALITÀ</b>

C248603 3/3